



MISSISSIPPI STATE
UNIVERSITYTM

Jefferson Lab

A Diamond Micro-strip Electron Detector for Compton Polarimetry

Amrendra Narayan

Mississippi State University

on behalf of Hall – C Compton Team

Outline

- ❖ Need of careful Polarimetry
- ❖ Hall – C Compton Overview
- ❖ Electron detector
- ❖ Data acquisition
- ❖ Preliminary results

Qweak and Polarimetry

The Qweak experiment aims to measure the weak charge of the proton with a precision of 4.1%, by measuring the parity violating asymmetry in polarized e-p elastic scattering with a precision of 2.5%


Qweak Error Budget		
Uncertainty	$\delta A_{PV}/A_{PV}$	$\delta Q_W/Q_W$
Statistical (~ 2500 hours at $150 \mu A$)	2.1%	3.2%
Systematic:		2.6%
Hadronic structure uncertainties		1.5%
Beam polarimetry	1.0%	1.5%
Effective Q^2 determination	0.5%	1.0%
Backgrounds	0.5%	0.7%
Helicity-correlated beam properties	0.5%	0.7%
Total:	2.5%	4.1%

one of the largest
experimental
contribution to the
error budget

The Hall-C Moller polarimeter is the highest precision polarimeter at JLab, however it is periodic, invasive and operates only at low currents..


The new Compton polarimeter is **continuous**, **non invasive** and can operate at **high currents**.

Overview: Compton Layout

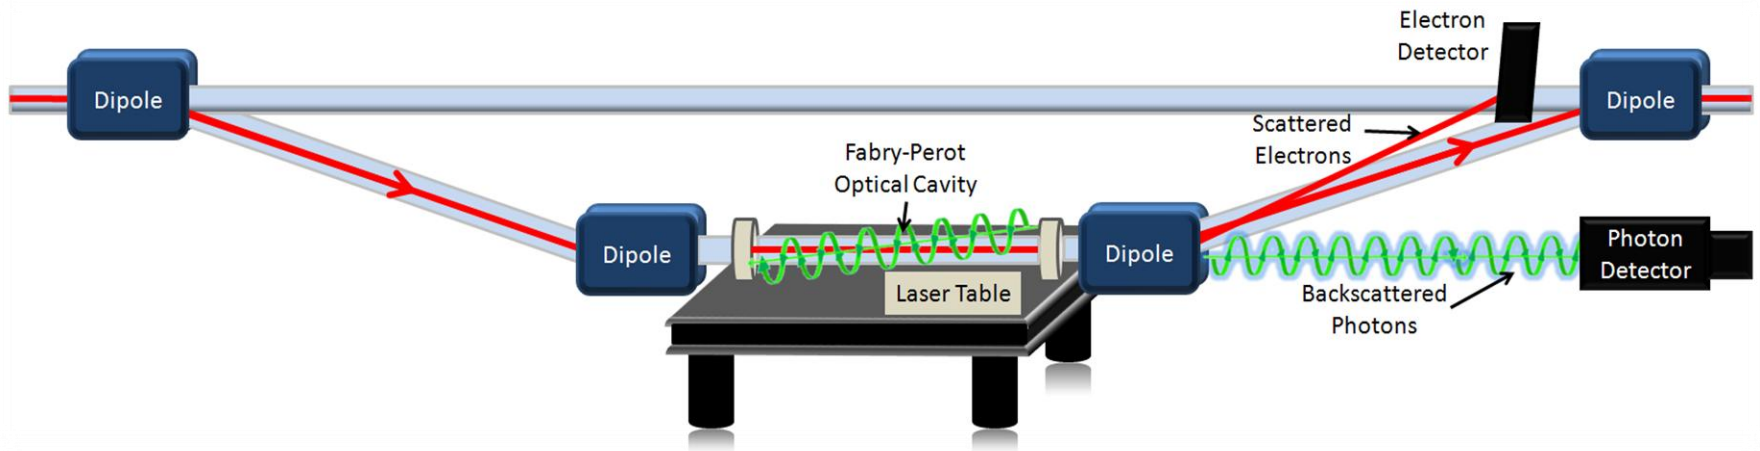


Parameter	Value
Beam Energy	1.16 GeV
Laser Wavelength	532 nm
Chicane bend angle	10.1 deg
Electron free drift distance	1.6 m
Max. Electron Displacement	17 mm
Compton edge energy	46 MeV

Overview: e-detector

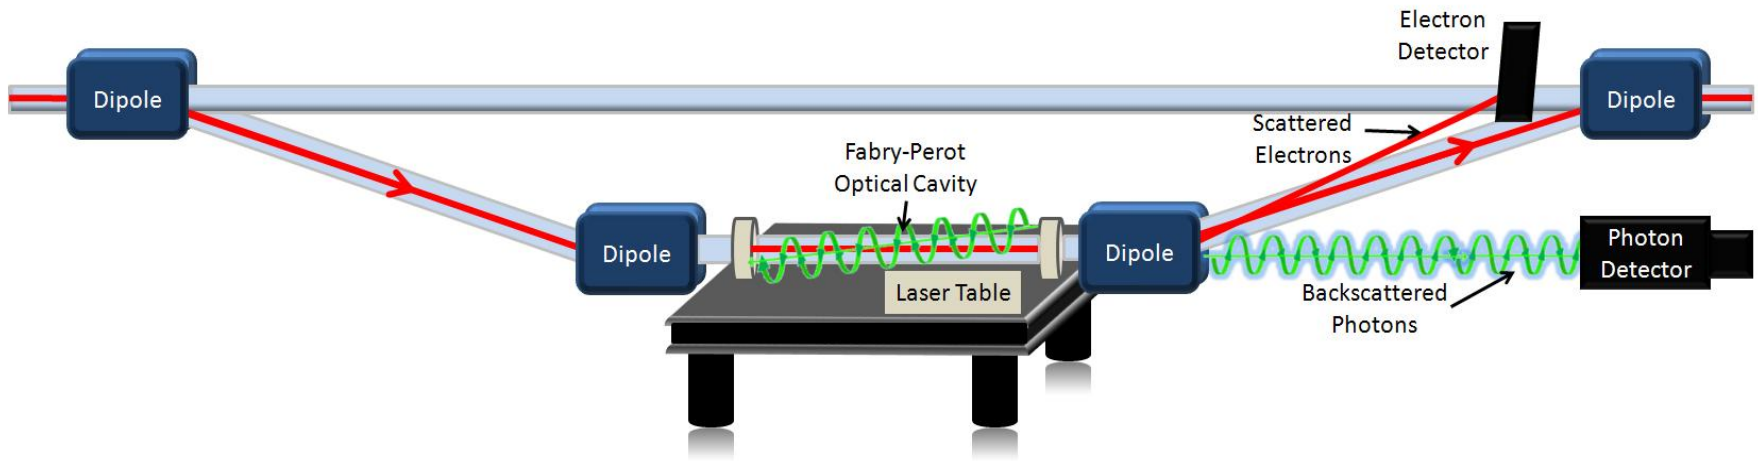


Through the γ -detector and e-detector we have two independent measurements having different uncertainties hence being a good cross-check on each other

- We use diamond micro-strip detector for detecting the Compton scattered electrons
- We have 4 planes of the detector to allow coincidence measurements

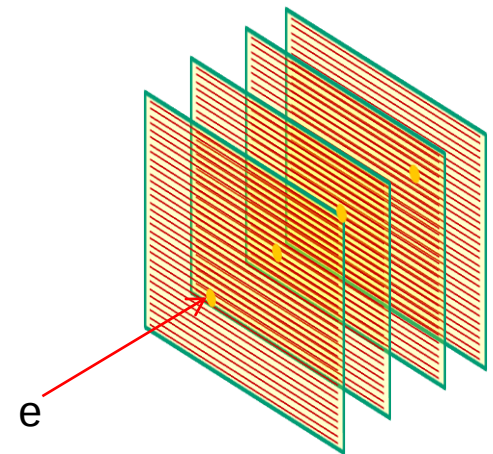

e-detector: working

The detector uses Diamond which is artificially grown using Chemical Vapor Deposition


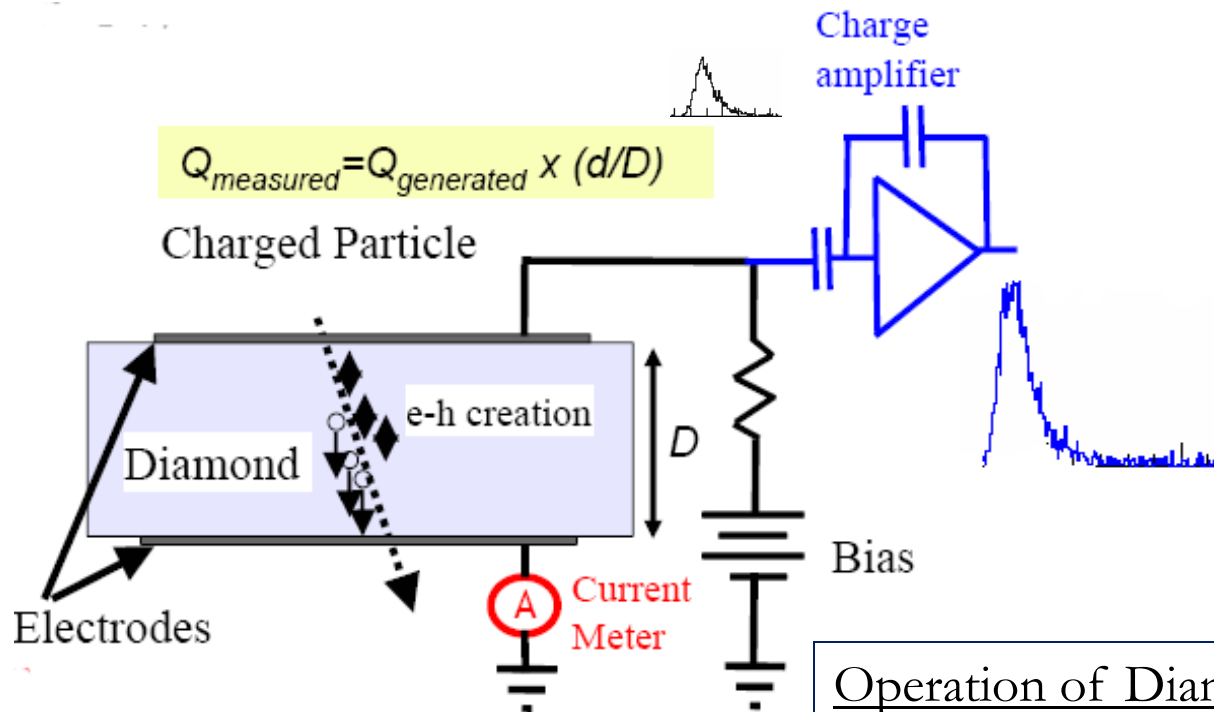


How does it work as a detector ?


Operation of Diamond Detectors

- Bias voltage ~ 1000 V,
- Charge collection distance (d) ~ 250 μm

e-detector: installation

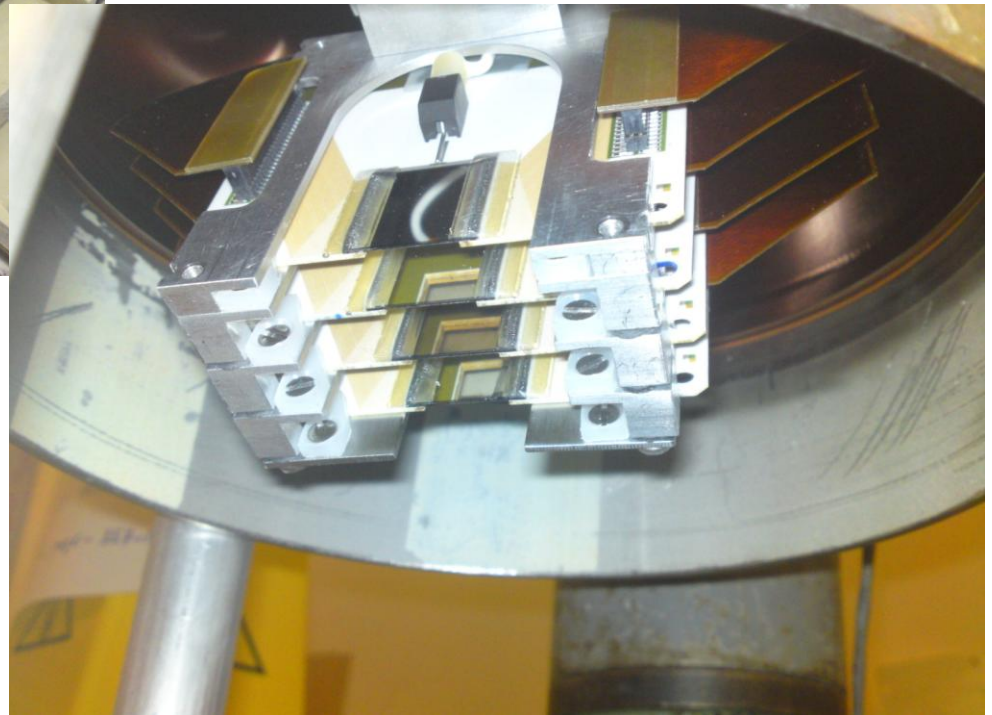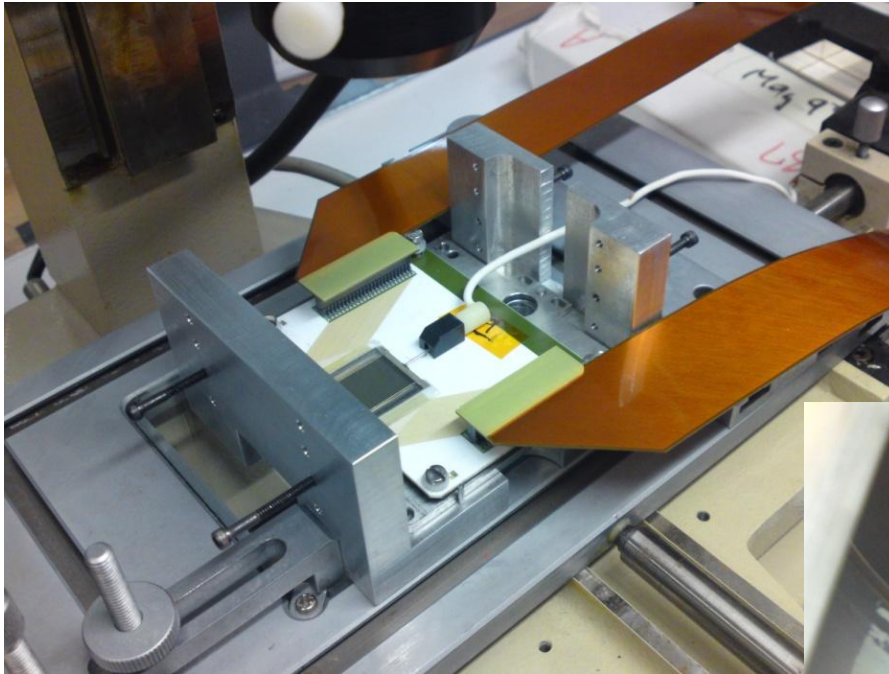

e-detector: installed

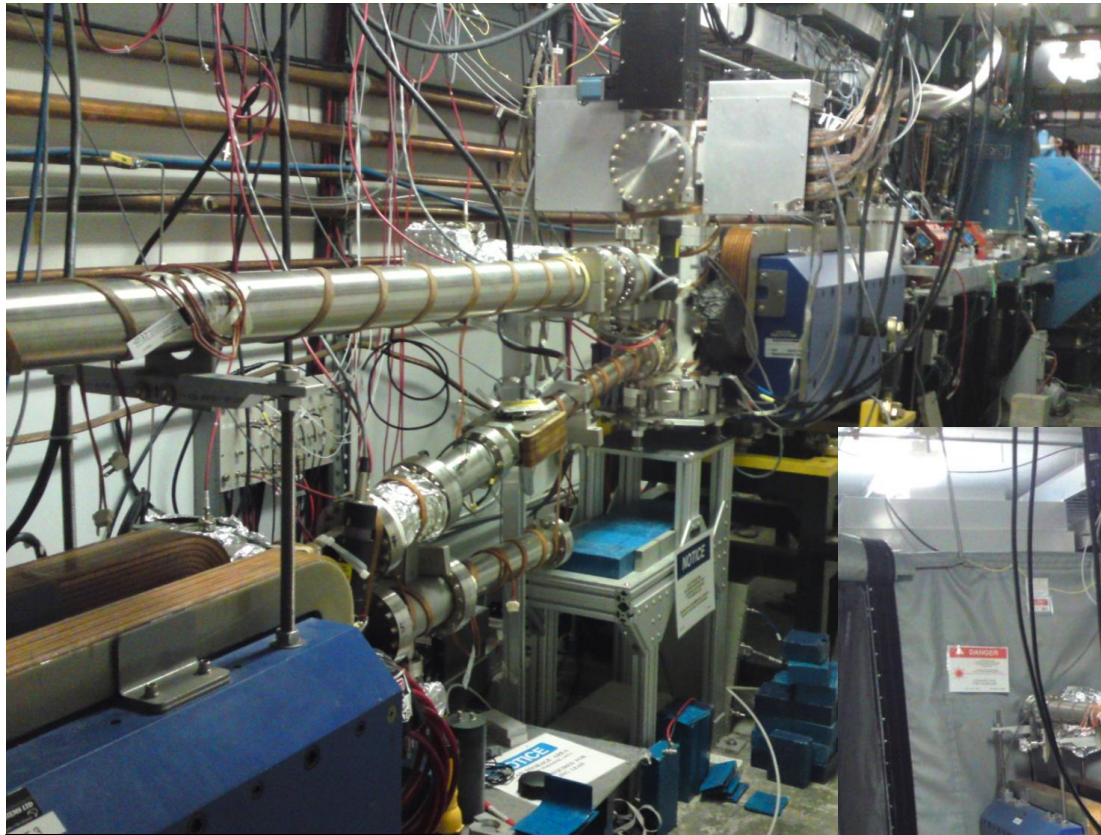

downstream view



upstream view

e-detector

Diamond micro - strip detectors




Amplification, shaping and
digitization of the signal



Trigger processed using FPGA
based v1495

This is the **first** Diamond micro-strip detector to be used as a tracking device in an experiment

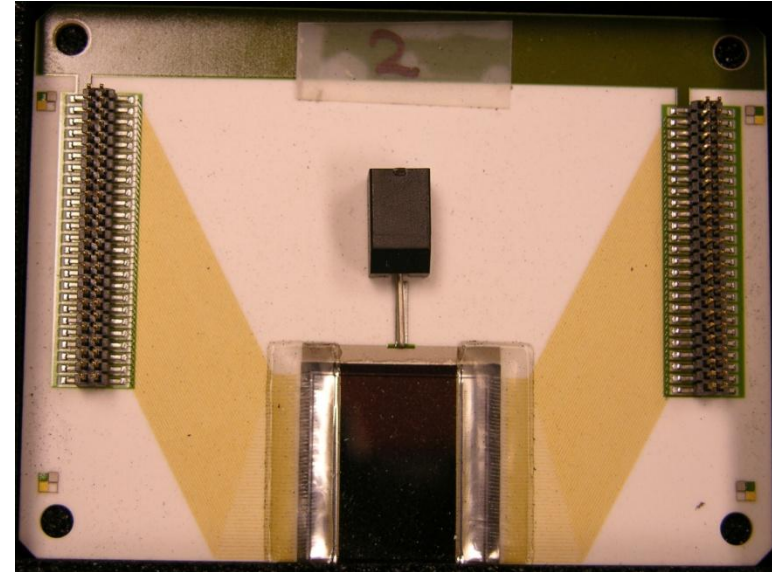


- alumina (ceramic) used for carrier board
- metallization (on diamond) done with TiPtAu
- detector dimensions : 21 mm x 21 mm
- detector thickness: 500 μm
- each detector plate has 96 strips
- strip pitch is 200 μm .

e-detector DAQ

Diamond micro - strip detectors


Amplification, shaping and digitization of the signal

Trigger processed using FPGA based v1495

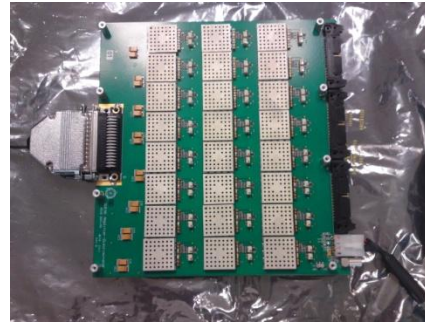

$$\text{Gain : } \frac{100 \text{ mV}}{(10 \times 10^3) \times (1.6 \times 10^{-19})} \\ = 60 \text{ mV / fC}$$

QWAD boards custom made by TRIUMF

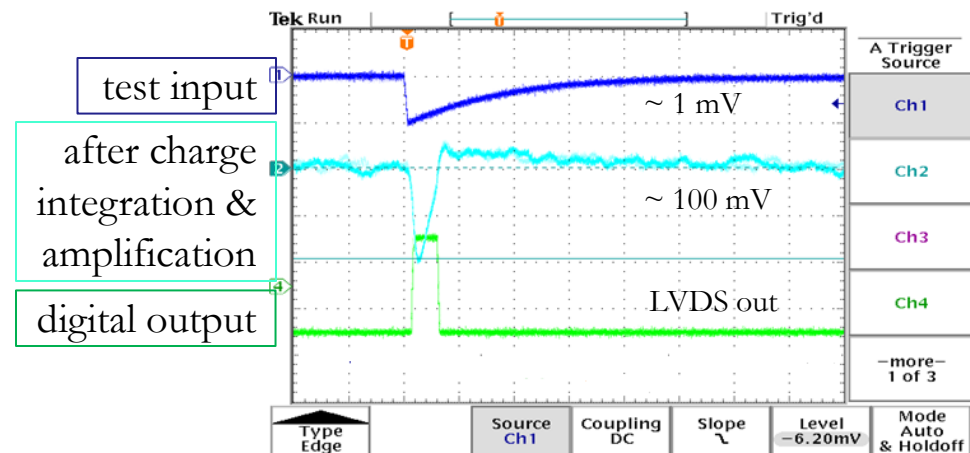

e-detector DAQ


Diamond micro - strip detectors



Amplification, shaping and
digitization of the signal




Trigger processed using FPGA*
based v1495

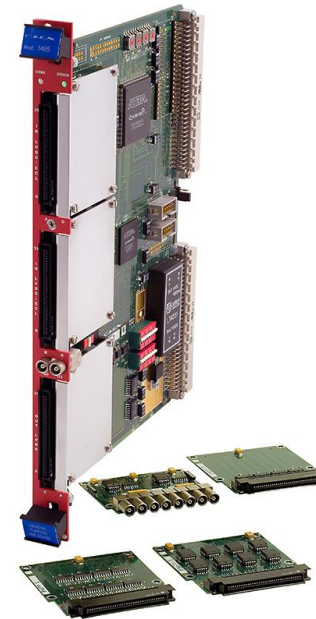

v1495 : CAEN general purpose logic modules. The module was programmed for trigger generation and data readout using VHDL

* Field Programmable Gate Array



e-detector DAQ : schematic

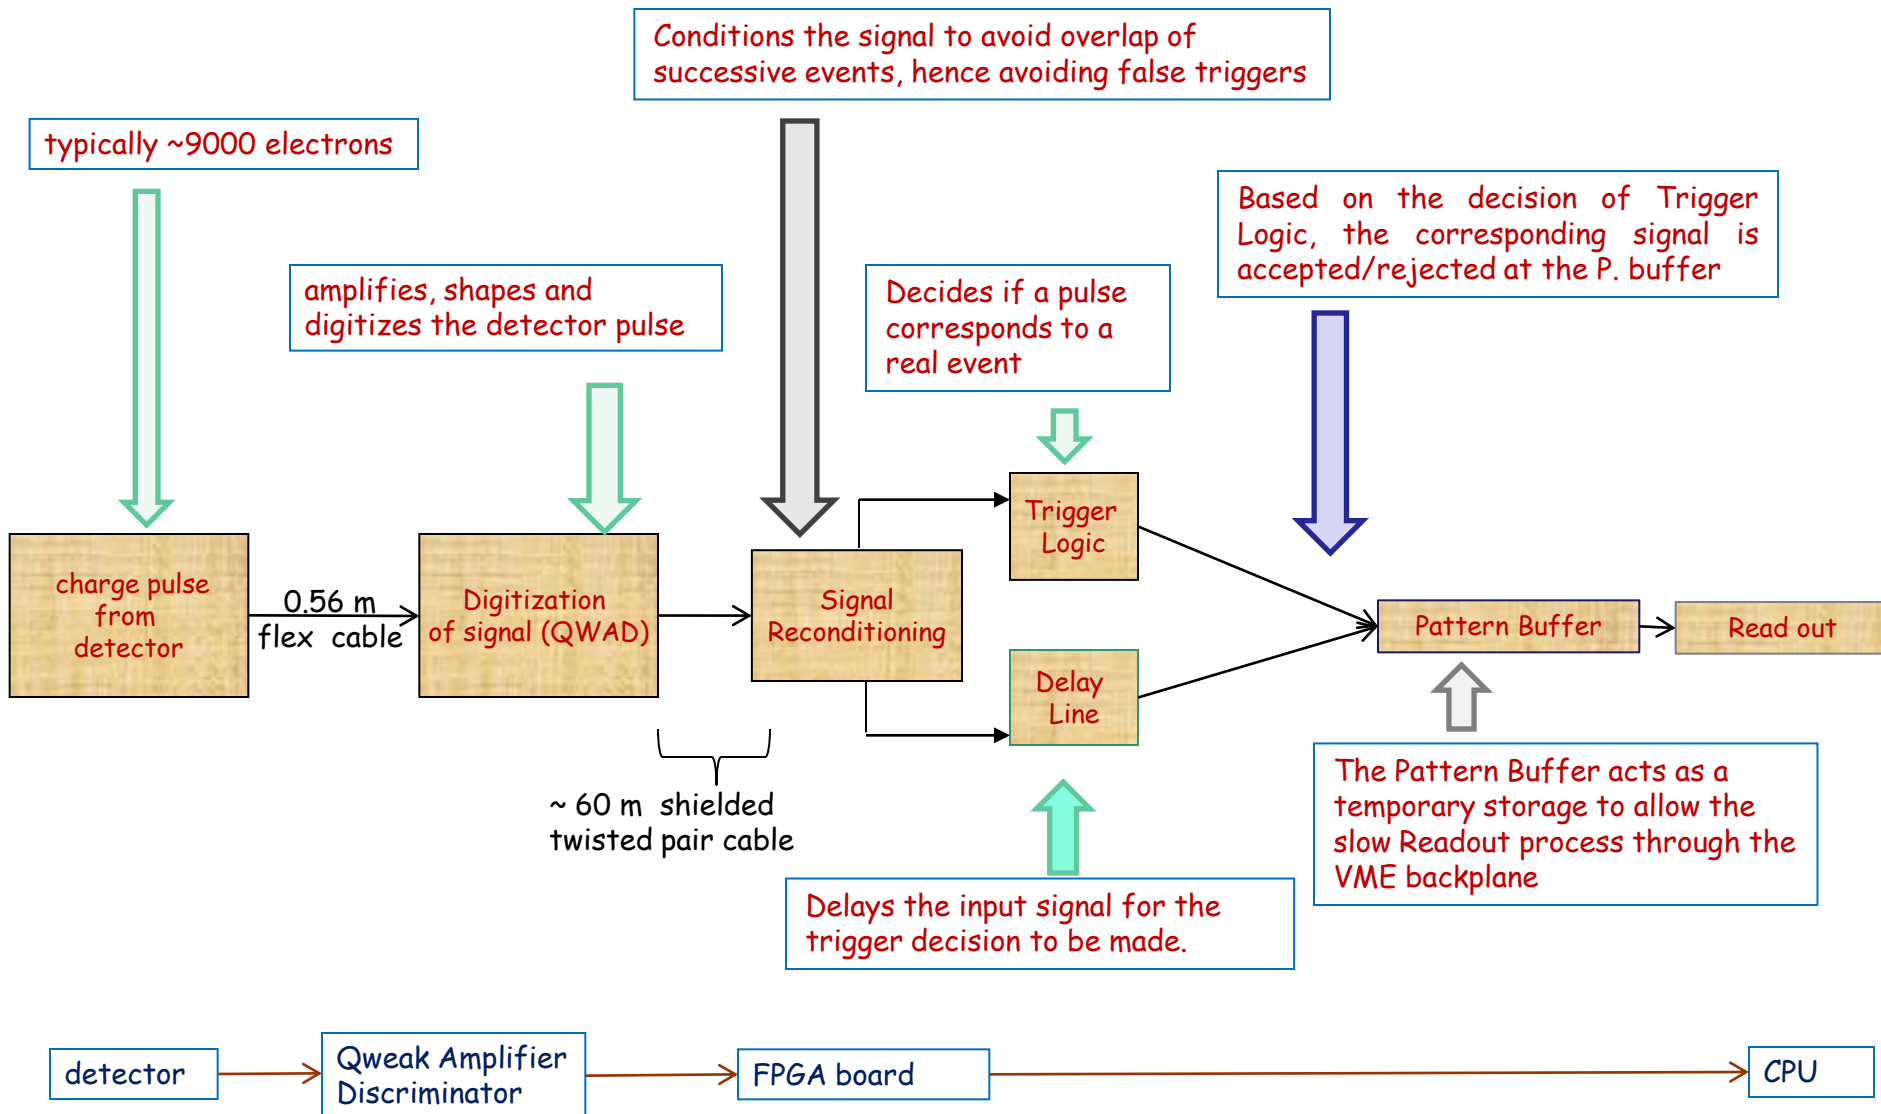

Asymmetry

$$A = \frac{\left(\frac{N_{LaserOn}^+}{Ch_{LaserOn}^+} - \frac{N_{LaserOff}^+}{Ch_{LaserOff}^+} \right) - \left(\frac{N_{LaserOn}^-}{Ch_{LaserOn}^-} - \frac{N_{LaserOff}^-}{Ch_{LaserOff}^-} \right)}{\left(\frac{N_{LaserOn}^+}{Ch_{LaserOn}^+} - \frac{N_{LaserOff}^+}{Ch_{LaserOff}^+} \right) + \left(\frac{N_{LaserOn}^-}{Ch_{LaserOn}^-} - \frac{N_{LaserOff}^-}{Ch_{LaserOff}^-} \right)}$$

Laser on : Laser off :: 2 : 1

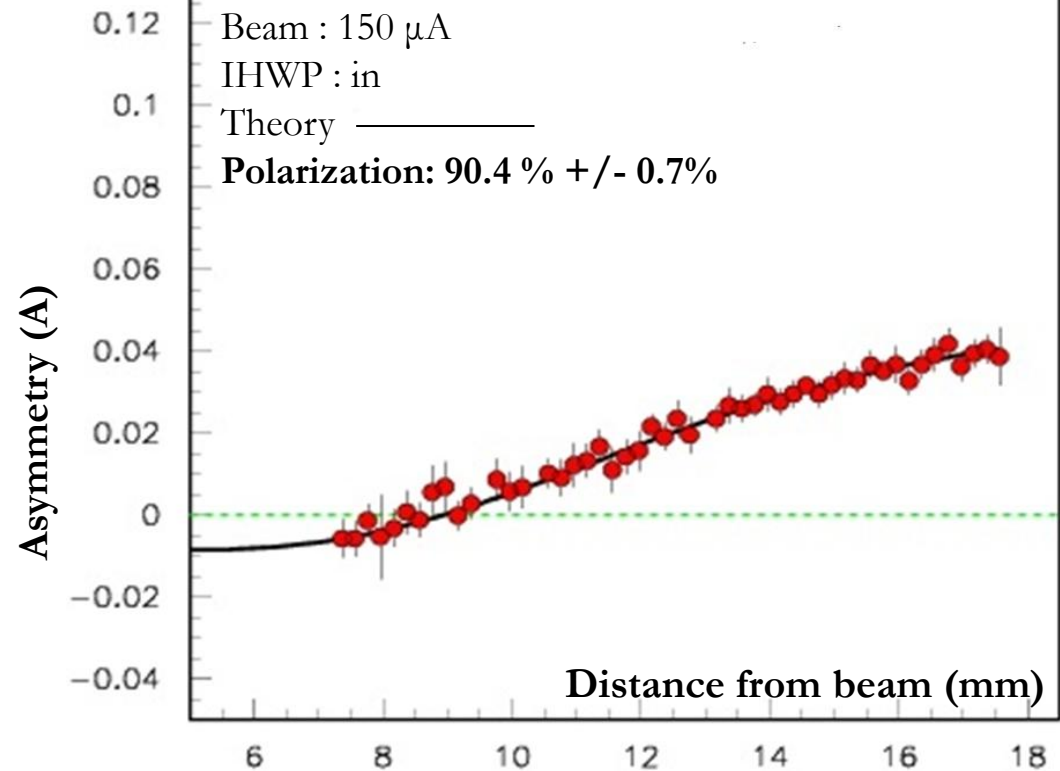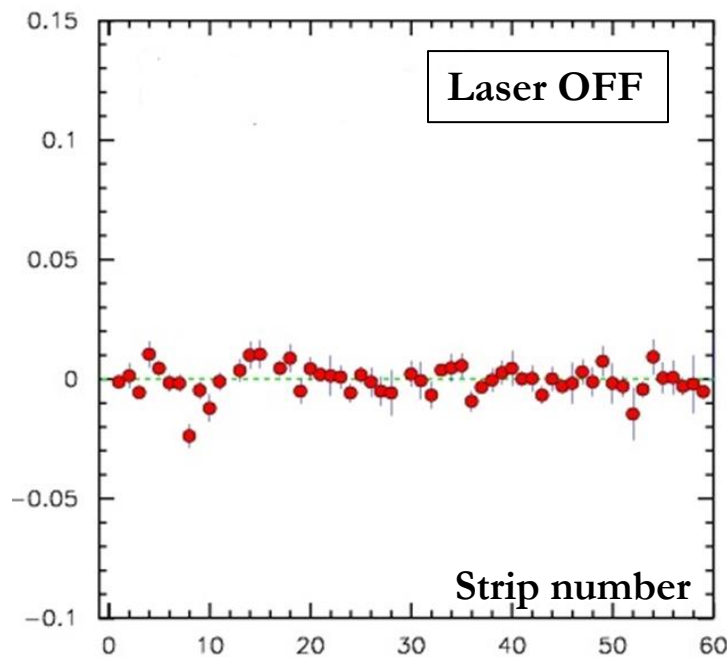

Calculating Polarization

we know:

- ✓ e-beam energy,
- ✓ magnet field map,
- ✓ detector location & geometry




deviation from
nominal e-beam



momentum of
Compton recoil e^-



Compton asymmetry is precisely
known from QED as a function
of momentum

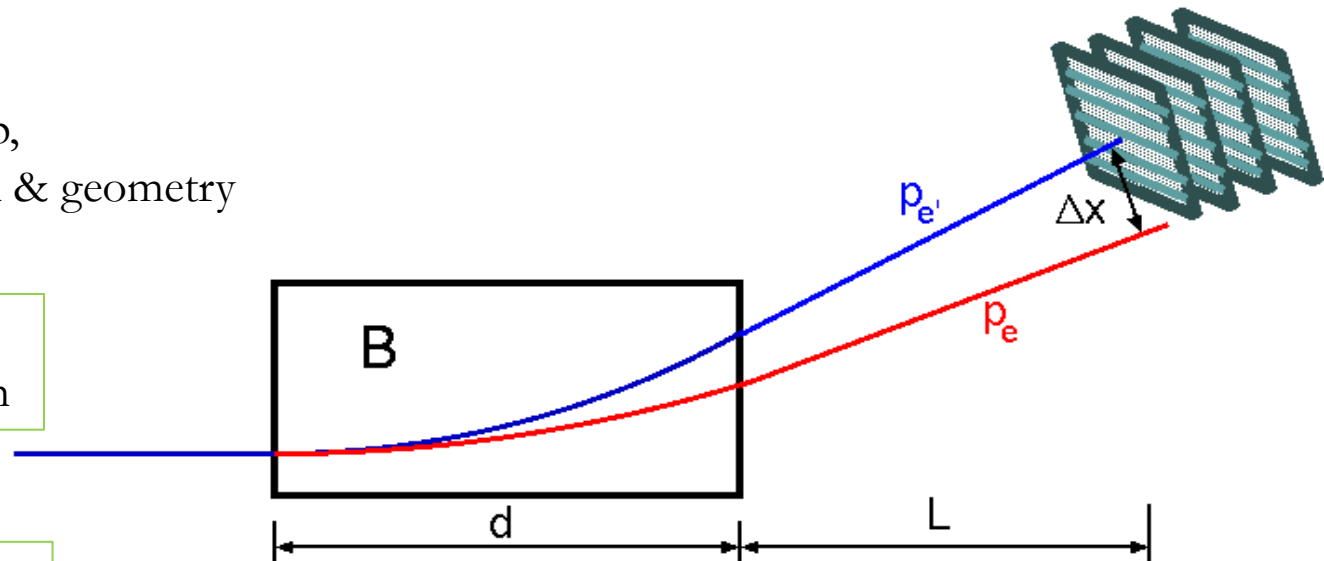

$$\Delta x_{\text{measured}} \xrightarrow{(p_e, B_{\text{map}}, L)} p_{e'} \longrightarrow \rho = k'/k$$



$$A(\rho)_{\text{Theory}} \longrightarrow A(\Delta x)_{\text{Theory}}$$

Fitting the calculated asymmetry to the measured asymmetry gives us the beam polarization


Calculating Polarization

- The Compton edge for the theoretical Compton asymmetry is fixed at 17.6 mm from the beam (based on known beam parameters and detector geometry)
- Polarization is obtained by performing a two parameter fit with **polarization** and **effective pitch**

$$A_{exp} = \frac{N^+ - N^-}{N^+ + N^-} = P_e P_\gamma A_{th} \quad \text{where } P_e = \frac{A_{exp}}{P_\gamma A_{th}}$$

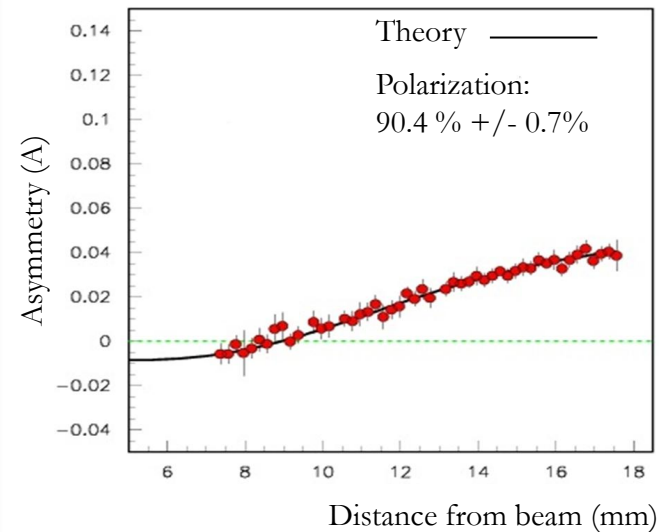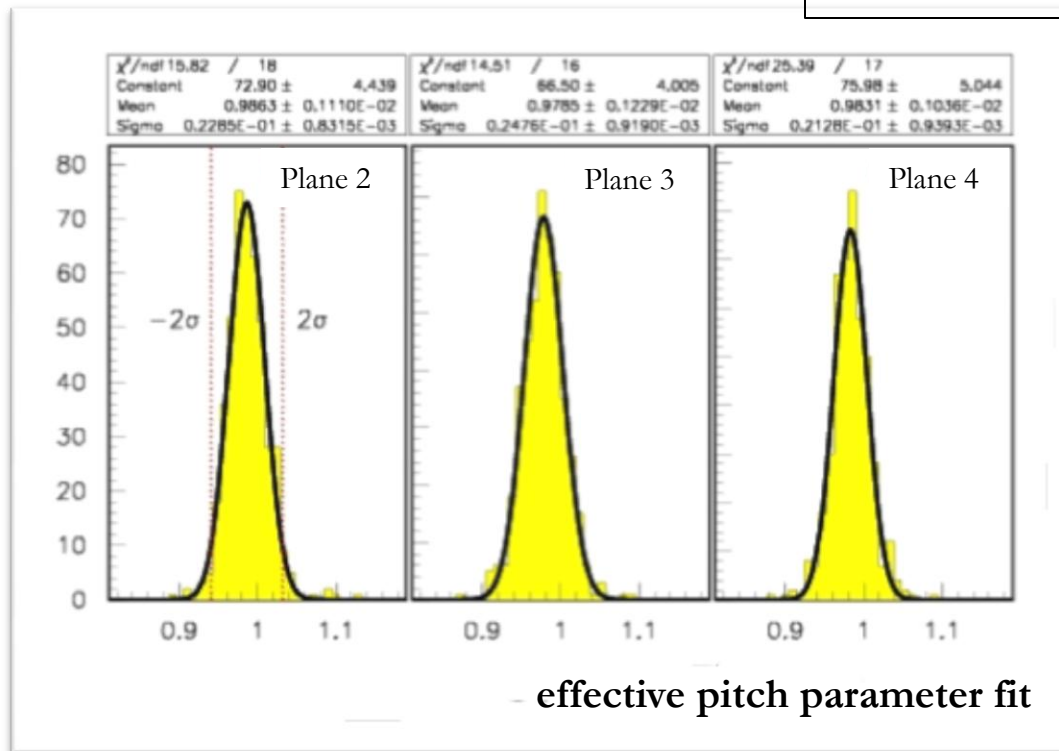

Preliminary Polarization

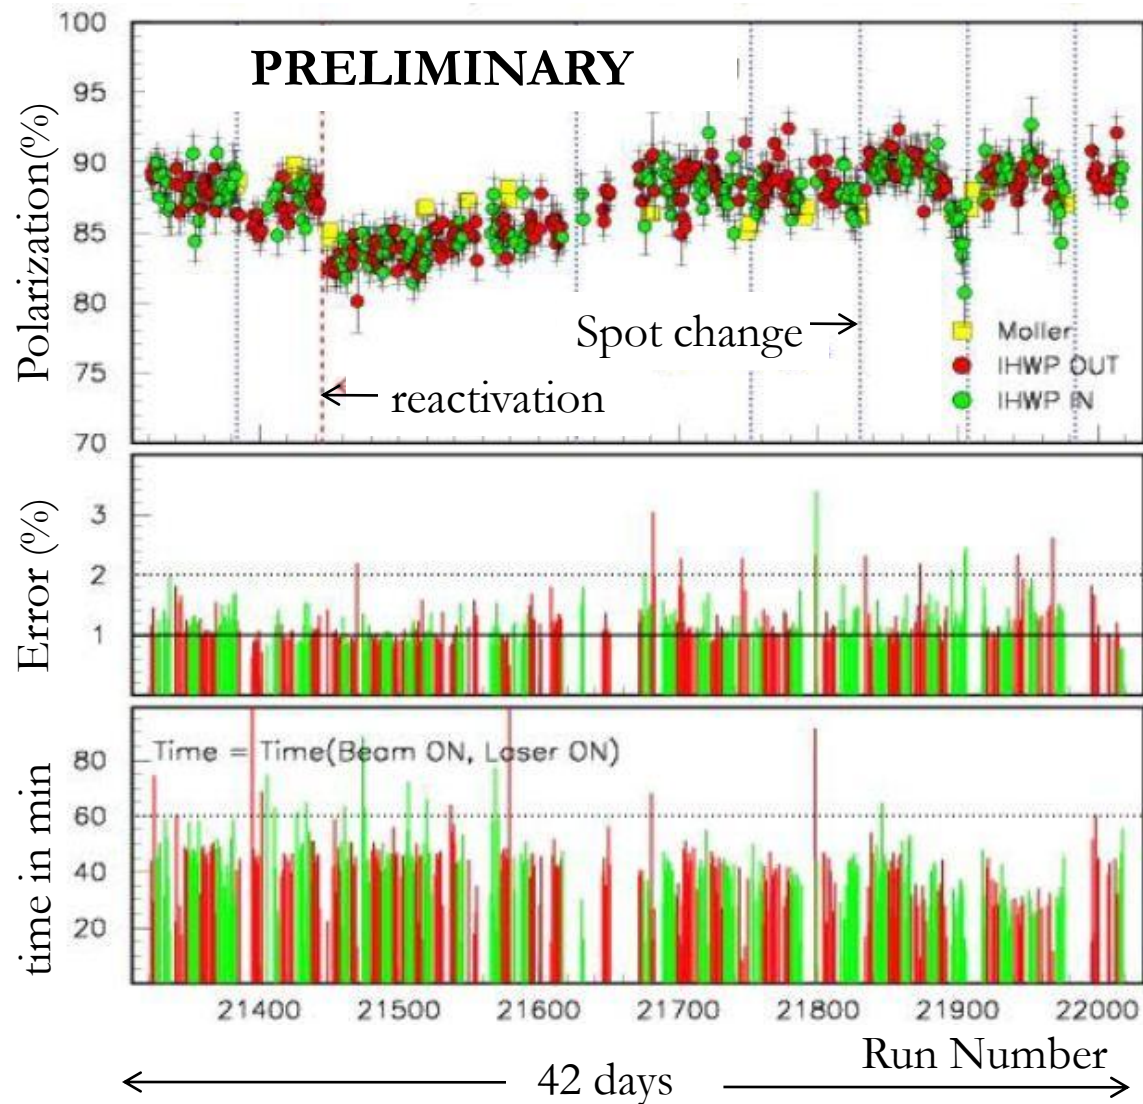

Apr 1, 2011



May 12, 2011

- 42 days of Compton data
- each point represents a ~ 1 hr run
- only Partial systematic error (due to strip – pitch) included
- the dotted vertical lines represent spot changes on the photocathode
- the dashed vertical line represents Re-activation
- on an average the beam current was $\sim 160 \mu\text{A}$

Quantum efficiency

Zooming into a region of consecutive spot changes:

Polarization was found to drop significantly before the spot move

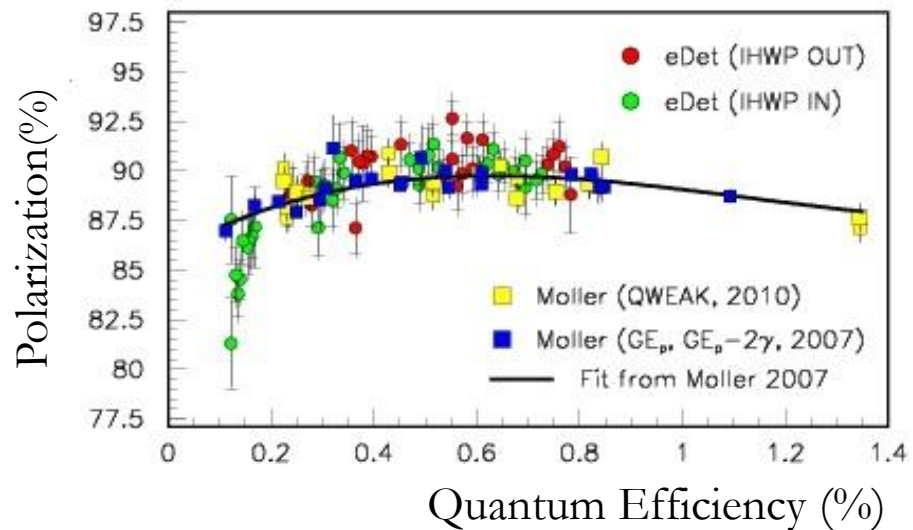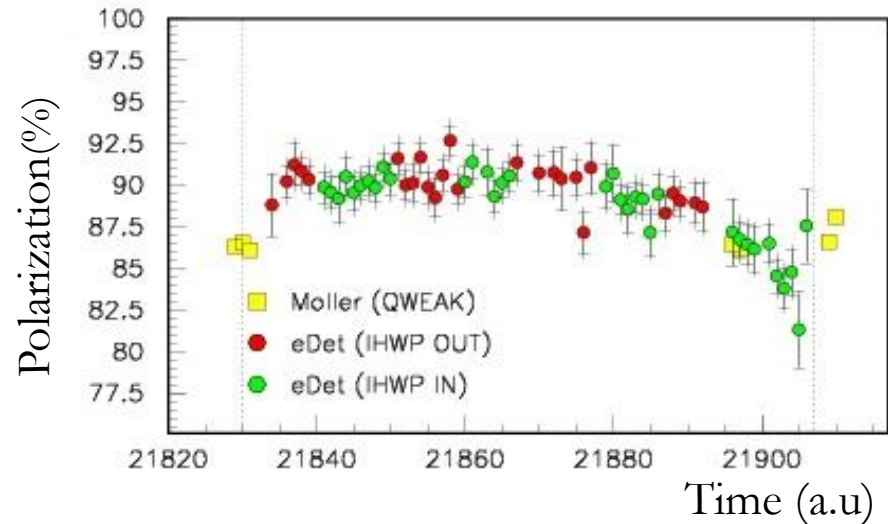

Systematic errors

Error Contribution	(%)Value
Due to detector strip size	0.2 %
Detector geometry	0.15 %
Difference between planes	0.2 %
Magnetic field	? (MC)
Beam & Laser Position	? (very small)
Charge Asymmetry	? (very small)
Dead time	? (very small)
TBD	?
Laser Polarization	99.5 +/- 0.4% (overall)
Total	0.50 %

Summary

- ✓ This is the first Diamond micro-strip detector to be used as a tracking device in an experiment
- ✓ Despite several challenges posed by the electronic noise environment, leading to strict trigger condition, we achieved the design goal of $< 1\%$ statistical uncertainty and projected low systematic
- ✓ All set to provide an independent absolute polarization measurement for Hall-C beam


Thanks



This presentation was made possible due to significant contribution from **Vladas Tvaskis, Dipangkar Dutta**


The speaker can be contacted at narayan@jlab.org

e-detector DAQ: Trigger

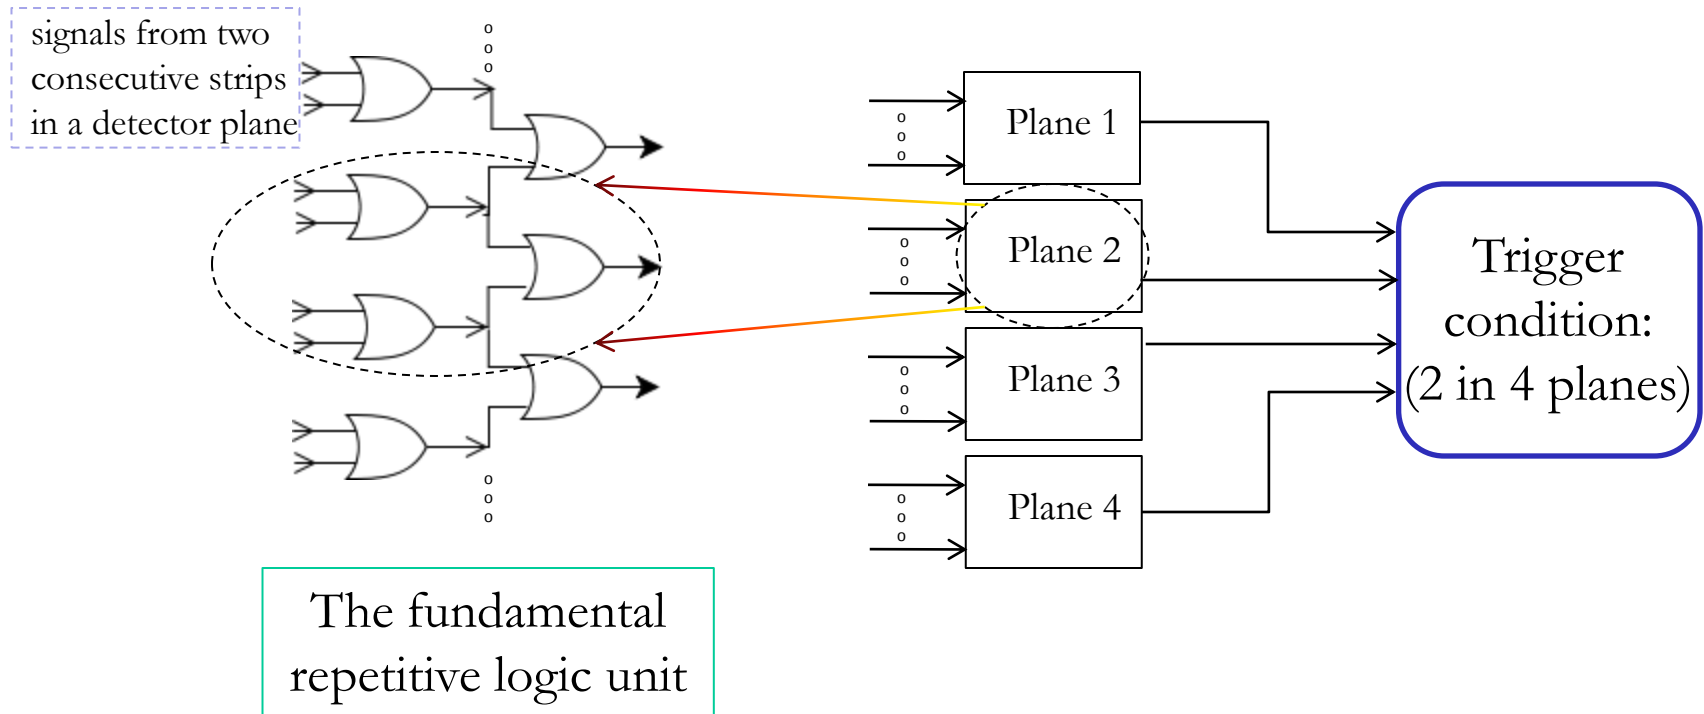

- to suppress background, we require a coincidence between multiple planes
- default trigger is hits on 2 out of 4 planes
- we localize the trigger in a single detector plane to 4 consecutive strips

Charge normalized strip hit

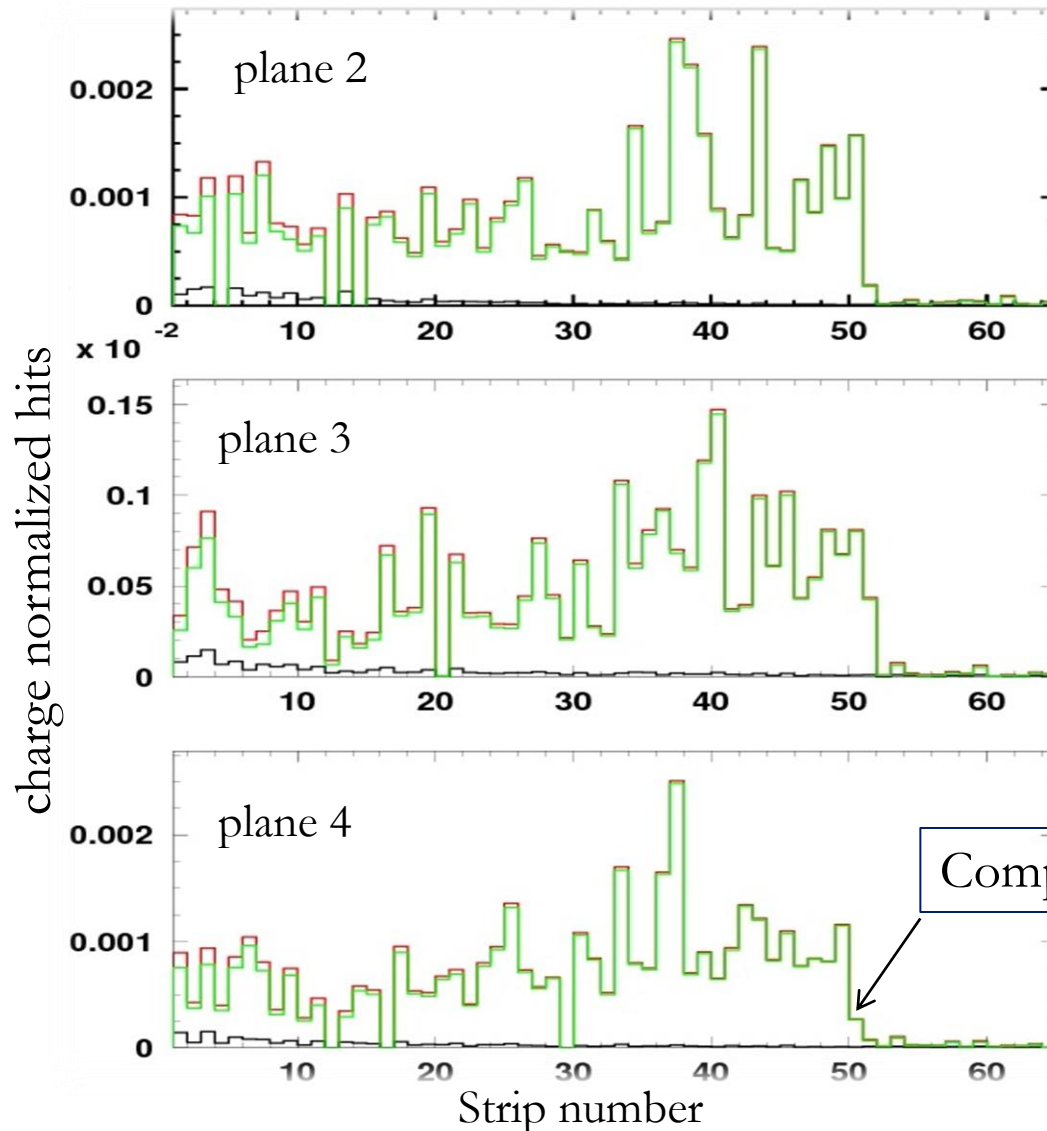

Beam Current: $150 \mu\text{A}$

Red: Laser On

Black: Laser Off

Green: Background
subtracted

we had 3 active planes
during Qweak Run 1



Background subtraction

$$N_{Laser\ On}^+ = N_{Laser\ On}^+ - Time_{Laser\ On}^+ / Time_{Beam\ Off} \times N_{Beam\ Off}$$

$$N_{Laser\ Off}^+ = N_{Laser\ Off}^+ - Time_{Laser\ Off}^+ / Time_{Beam\ Off} \times N_{Beam\ Off}$$

$$N_{Laser\ On}^- = N_{Laser\ On}^- - Time_{Laser\ On}^- / Time_{Beam\ Off} \times N_{Beam\ Off}$$

$$N_{Laser\ Off}^- = N_{Laser\ Off}^- - Time_{Laser\ Off}^- / Time_{Beam\ Off} \times N_{Beam\ Off}$$

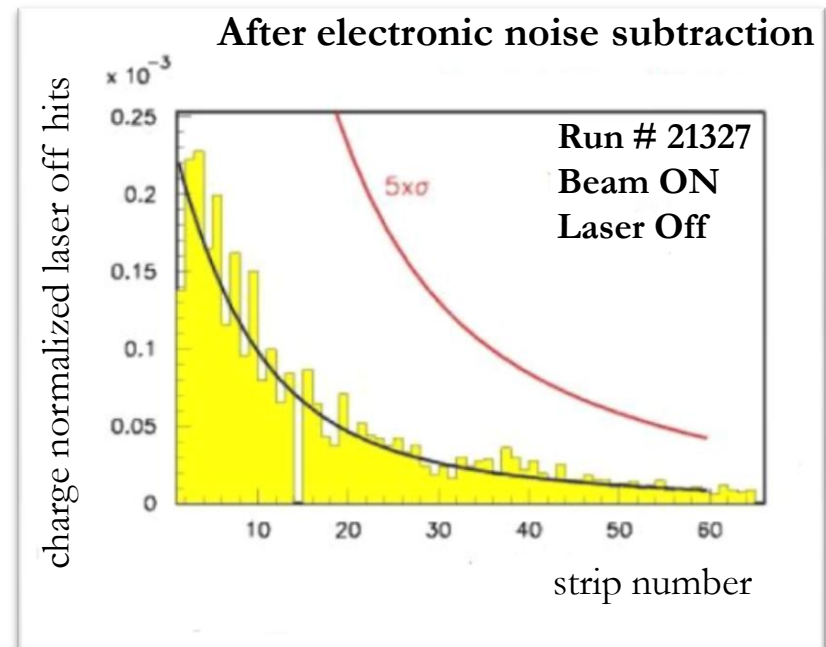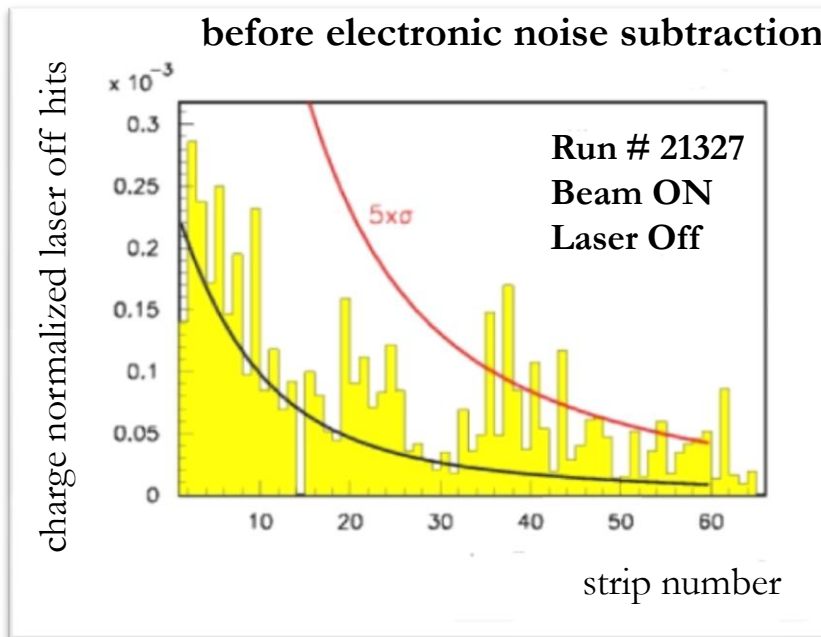

why diamond ?

Property	Silicon	Diamond
Band Gap (eV)	1.12	5.45
Electron/Hole mobility (cm ² /Vs)	1450/500	2200/1600
Saturation velocity (cm/s)	0.8×10 ⁷	2×10 ⁷
Breakdown field (V/m)	3×10 ⁵	2.2×10 ⁷
Dielectric Constant	11.9	5.7
Displacement energy (eV)	13-20	43
e-h creation energy (eV)	3.6	13
Av. e-h pairs per MIP per micron	89	36
Charge collection distance (micron)	full	~250

Low leakage current, short noise

Fast signal collection

Low capacitance, noise

Radiation hardness

Smaller signal